

housings Mignon 3P SX

for cartridges with standard flat seals



Mignon S

Mignon L

Mignon Duplex

APPLICATIONS

Filtration and treatment of water with neutral pH and drinking water.

Domestic use: filtration of drinking water, protection of taps, boilers, washing machines, and other installations.

Technical use: pre-filtration, micro-filtration; protection of pumps, heating systems, softeners, demineralising and chlorine-removing appliances, reverse osmosis units.

WORKING CONDITIONS

Max working pressure _____ 7 BAR

Max working temperature _____ 45°C

SPECIFICATIONS

Non-toxic materials, suitable for drinking water.

Head and ring nut: ABS.


Transparent bowl: SAN

O-ring: ETP

Breather-valve: body polypropylene, O-ring ETP.

IN/OUT threads: CW 614 N brass inserts.

Cartridge height	housings with transparent bowl AS IN/OUT female threads with FO brass inserts	IN/OUT threads	mm	
			A	B
5"M	Mignon L 3P MFO AS	1/2"	176	94
5"M	Mignon S 3P MFO AS	1/2"	177	90
5"M	Mignon Duplex 3P MFO AS	1/2"	176	194

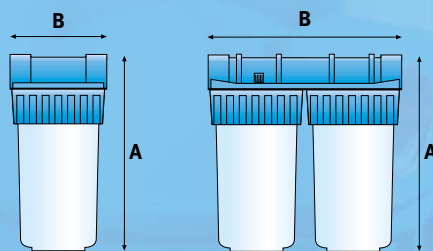

VARIANTS available on minimum quantity

FP female plastic IN/OUT threads, BSP type 1/2".

AB housings with opaque bowl, impermeable to the light.



Ayrıntılı Bilgi ve Sipariş için :

e-mail : bilgi@tusam.com.tr

web : www.tusam.com.tr

Phone : +90 850 302 0 392



wall bracket
Mignon Duplex



wall bracket
screws



Diffuser tube
Mignon

